

Tutorial

Installation License Key Measurement Partner Suite

Copyright ©

The information contained in this manual is the property of ENMO and may not be reproduced, in whole or in part, without written approval from ENMO.

Service Partner in Sound & Vibration

1 Introduction

The accompanying software package of the sound level meter B&K 2250-L/2250/2270 is 'Measurement Partner Suite' (BZ-5503 v4). This is the successor to 'Evaluator' (BZ-5503 v3). The abbreviation 'MPS' is also often used in colloquial speech.

The latest version of the software can always be found via the link:
<https://update.bksv.com/BZ5503/Latest/setup.exe>

Measurement Partner Suite is free up to a certain level. For example, you can read, archive, and export your measurement data without a license. The basic functionality to analyze your measurement, such as the logging profile, parameters and audio listening are also free.

From the moment you want to do post-processing on your measurement file, such as markers or frequency analysis, you will need a license key.

You can order this license from ENMO at any time and it is available in various formulas. This can be purchased for one or more sound meters, for a certain period or a permanent license.

After purchase, depending on your license choice, you will be in possession of an authorization code, or your license must be downloaded based on the serial number of your sound meter. This tutorial will guide you on how to go from a paper license form to an effective software activation.

2 Activation procedures

2.1 Via Authorization code

If your license card says 'License authorization Card', the license will also have to be activated via the available authorization code. Follow the next steps to accomplish this.

Step 1:

You received a License Authorization Card from B&K, to be able to use Measurement Partner Suite to the fullest. This license must be activated for your personal device.

Surf to the website below and fill in your License Authorization Code.

Then click on 'Submit'.

<http://license.bksv.com/>



LICENSE AUTHORISATION CARD

Important: Please place this authorisation card in a safe place – you will need it for future upgrades.

Your Application is:

BZ-5503--060-

Your License Authorisation Code is:

OR 16119-62716673

Your System Order Number is (not used for license fulfillment):

0980281

Write your Instrument Serial number here: (Please, see the back of your Instrument)



Online License Centre

Step 1 of 3

Your license authorization is an e-mail address

You need to continue to our "License & delivery portal" by clicking this button:

License & delivery portal →

Your license authorization has the format ORxxxxx-yyyyyyy

To download demo licenses or legacy licenses for Measurement Partner Suite, enter your login in the field below and click **Submit**.


Login:

Submit

Step 2:

Enter the serial number of your sound level meter in the 'Enter Host ID' check box.

Then click on 'Fulfill License'.

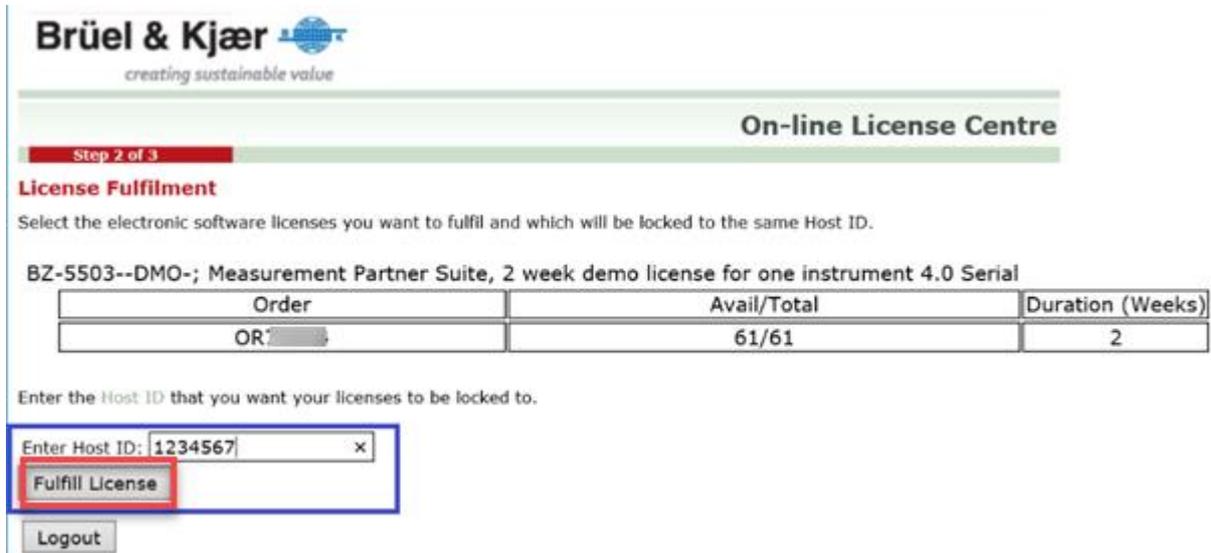

Brüel & Kjær 
creating sustainable value

On-line License Centre

Step 2 of 3

License Fulfilment

Select the electronic software licenses you want to fulfil and which will be locked to the same Host ID.

BZ-5503--DMO-; Measurement Partner Suite, 2 week demo license for one instrument 4.0 Serial


Order	Avail/Total	Duration (Weeks)
OR70954	61/61	2

Enter the Host ID that you want your licenses to be locked to.

Enter Host ID:

Step 3:

Check the serial number and click 'Confirm'.

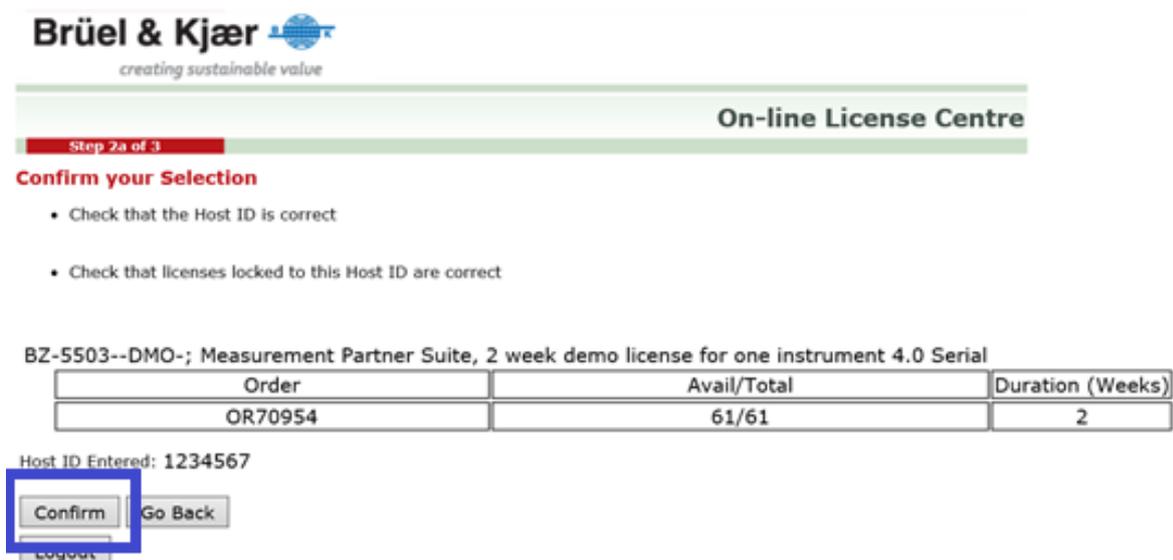

Brüel & Kjær 
creating sustainable value

On-line License Centre

Step 2a of 3

Confirm your Selection

- Check that the Host ID is correct
- Check that licenses locked to this Host ID are correct

BZ-5503--DMO-; Measurement Partner Suite, 2 week demo license for one instrument 4.0 Serial

Order	Avail/Total	Duration (Weeks)
OR70954	61/61	2

Host ID Entered: 1234567

If you enter an incorrect serial number, the license will not be linked to the measurement files of your sound meter. The authorization code can no longer be used again. If something went wrong, please contact ENMO to help you further.

Step 4:

Click on 'save to file' and download your .lic file.

This can be done at any location. The software will install it in the right place.



Brüel & Kjær  *creating sustainable value*

Online License Centre

Step 3 of 3

Save License File

Your license file has been generated, and is ready to be saved to your PC.

Save to File

1. Save the license file on your desktop as type: .lic document.
2. Open Brüel & Kjær License Manager and **browse** for the saved license file on your desktop.
3. Click **Open** to automatically store the license in the correct folder.

NOTE: It is recommended to move expired licenses from the license folder to the archive folder.

Download your PULSE Software


Logout

Step 5:

Add the license in Measurement Partner Suite. To do this, open the program.

First click on the “sound level meter” and then on ‘Measurement Partner Licenses’.
Then click on 'Browse', after which you can select your license file (.lic). Click on 'Open'.

The license will be added!

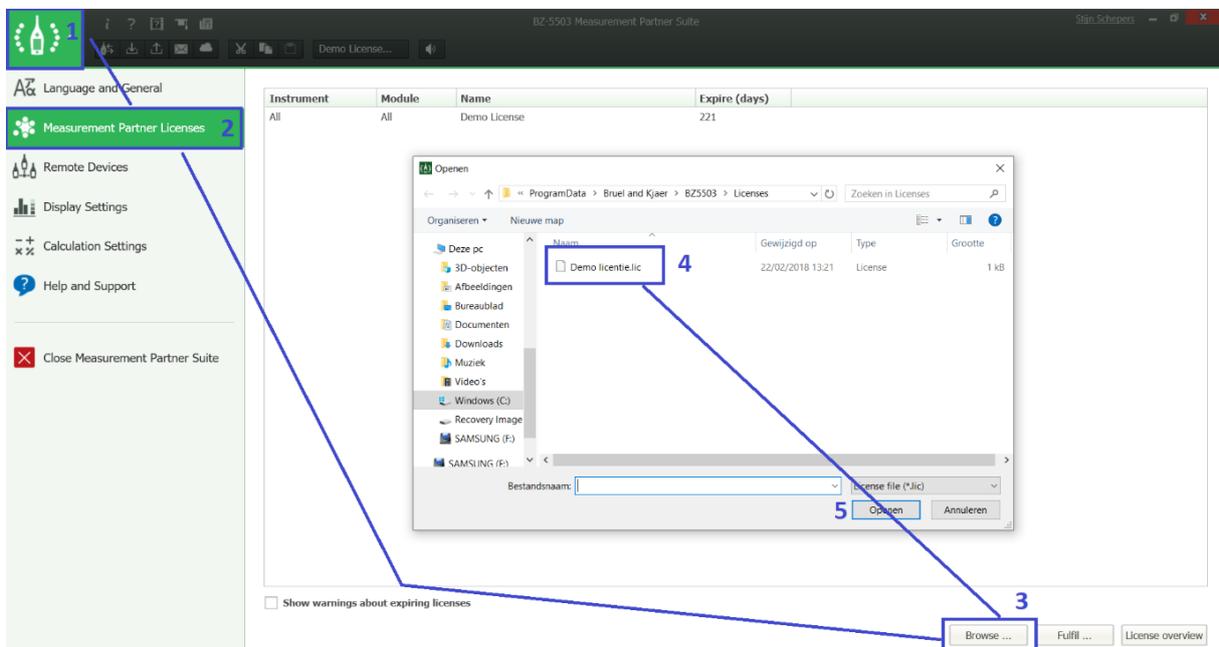

82-5503 Measurement Partner Suite

Instrument	Module	Name	Expire (days)
All	All	Demo License	221

Open

ProgramData > Bruel and Kjaer > BZ5503 > Licenses

Naam	Gewijzigd op	Type	Grootte
Demo licentie.lic	22/02/2018 13:21	License	1 kB

Bestandsnaam: License file (*.lic)

Openen **Annuleren**

Show warnings about expiring licenses

Browse ... **Fullfil ...** **License overview**

Step 6:

Important!!!

Restart Measurement Partner Suite!

2.2 Via Serial Number

If your license card says 'Measurement Partner Suite License Card', the license will be requested based on the serial number of your sound level meter. Follow the next steps to accomplish this.

Step 1:

You received a Measurement Partner Suite License Card from B&K, to fully use Measurement Partner Suite. A corresponding license file must be downloaded.

Surf to the website below:

<http://update.bksv.com/licenseupdater>

Brüel & Kjær 

MEASUREMENT PARTNER SUITE LICENSE CARD

Important: Please place this license card in a safe place – you will need it to download your software license.

Application License Type:	BZ-5503--NI-
License Expiry Date:	Never
License Host ID/Serial Number:	3024735


BR 1025-13

Step 2:

Enter the **serial** number of your sound level meter at 'Enter Host ID or serial number here', if you have a license for one sound level meter.

Enter the **Host ID** of your USB dongle at 'Enter Host ID or serial number here', if you have a license for multiple sound meters and are working with one dongle.

Then click on 'Download license for Host ID'. The file can be saved in any location. The software will install it in the right place.

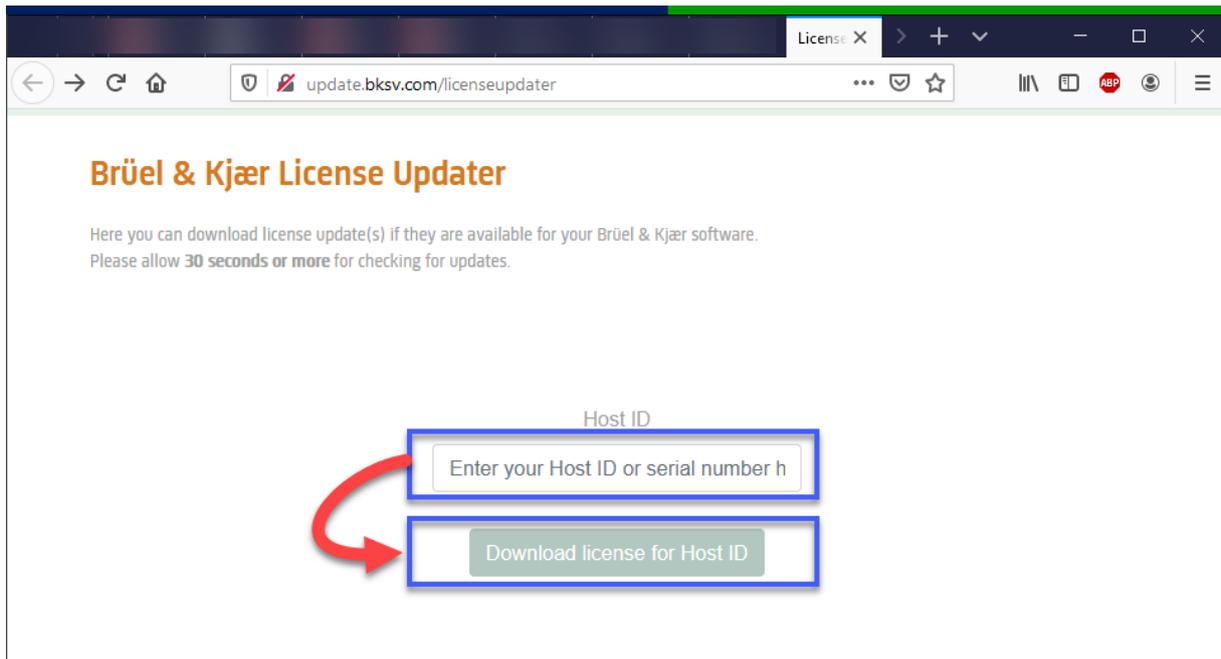


Step 3:

Add the license in Measurement Partner Suite. To do this, open the program.

First click on the “sound meter” and then on ‘Measurement Partner Licenses’.

Then click on 'Browse', after which you can select your license file (.lic). Click on 'Open'.

The license will be added!

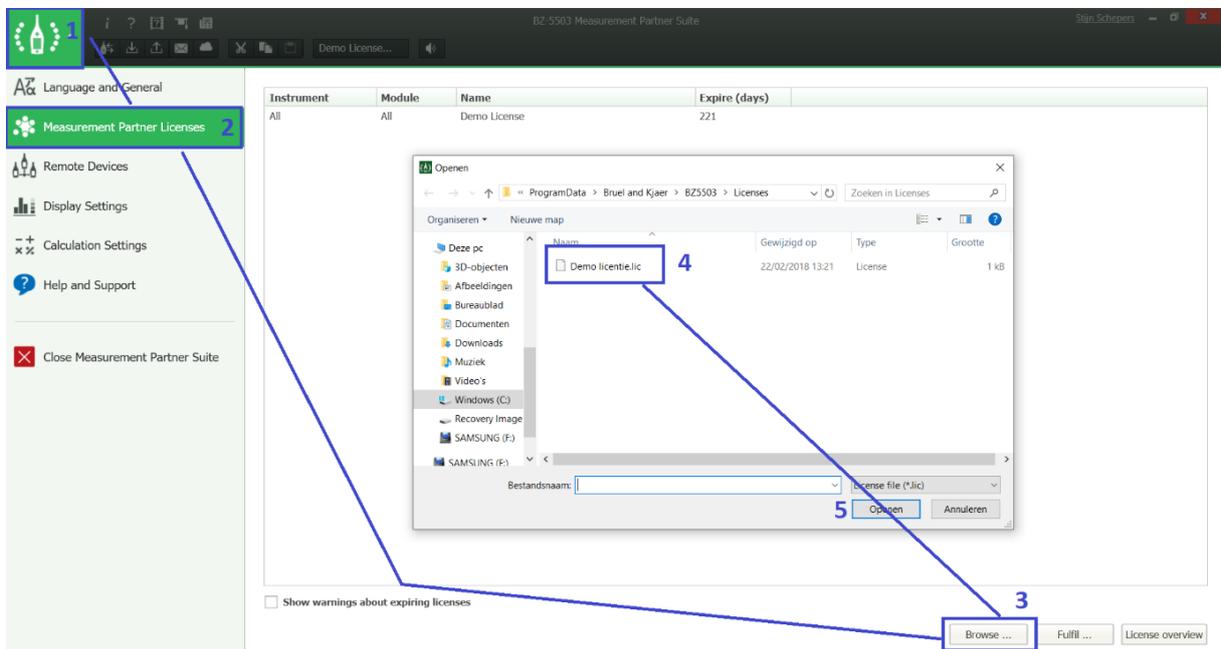

Step 4:

Important!!!

Restart Measurement Partner Suite!